

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

218104US0PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/030988

INTERNATIONAL APPLICATION NO.
PCT/FR00/01992

INTERNATIONAL FILING DATE
10 July 2000

PRIORITY DATE CLAIMED
16 July 1999

TITLE OF INVENTION
A NOVEL WATER-RETENTION AGENT WATER-SOLUBLE IN A NEUTRAL OR ALKALINE
MEDIUM OF THE VINYL-ACRYLIC COPOLYMER TYPE, APPLICATIONS TO COATING COLORS FOR PAPER
AND CARDBOARD, AND COATING COLORS AND PAPERS AND CARDBOARDS THUS OBTAINED

APPLICANT(S) FOR DO/EO/US

DUPONT Francois et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

PCT/IB/304/Drawings (1 sheet)
PCT/IB/308/Notice of Priority
Form PTO-1449

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.101) 10/030988	INTERNATIONAL APPLICATION NO. PCT/FR00/01992	ATTORNEY'S DOCKET NUMBER 218104US0PCT
---	--	---


24. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	- 20 =	0	x \$18.00	\$0.00	
Independent claims	- 3 =	0	x \$84.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,020.00	
Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$1,020.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,020.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$1,020.00	
				Amount to be refunded	\$
				charged	\$

- a. ☒ A check in the amount of **\$1,020.00** to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **15-0030** A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Surinder Sachar
Registration No. 34,423



22850

Surinder Sachar

SIGNATURE

Norman F. Oblon

NAME

24,618

REGISTRATION NUMBER

Jan 16 2002

DATE

10/030988
PTO/PCT Rec'd 12 APR 2002
#6

218104US-0PCT

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF: :
FRANCOIS DUPONT ET AL : ATTN: APPLICATION DIVISION
SERIAL NO: 10/030988 :
FILED: JANUARY 16, 2002 : EXAMINER:

FOR: A NOVEL WATER-RETENTION:
AGENT WATER-SOLUBLE IN A
NEUTRAL OR ALKALINE MEDIUM
OF THE VINYL-ACRYLIC COPOLYMER
TYPE, APPLICATIONS TO COATING COLORS
FOR PAPER AND CARDBOARD, AND
COATING COLORS AND PAPERS AND
CARDBOARDS THUS OBTAINED

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Prior to examination on the merits, please amend the above-identified application as follows:

IN THE CLAIMS

Please amend the claims as shown in the marked-up copy following this amendment to read as follows:

7. (Amended) A paper coating color characterized in that it contains, in addition to the usual additives, the novel agent according to Claim 4.

9. (Amended) A paper coating color according to Claim 7, characterized in that its water retention and Brookfield viscosity are adjusted simultaneously.

202110 88500001

10. (Amended) Paper and cardboard coated with the coating color according to
Claim 7.

REMARKS

Claims 1-10 are active in the present application. Claims 7 and 9-10 have been
amended to remove multiple dependencies. No new matter is added. An action on the merits
and allowance of claims is solicited.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.

Shoschmieder

Norman F. Oblon
Attorney of Record
Registration No. 24,618

Stefan U. Koschmieder, Ph.D.
Registration No. 50,238

20211103 085605001



22850

(703) 413-3000
Fax #: (703) 413-2220
SUKOS/rac
I:\atty\SUKOS\218104US-PR.wpd

Marked-Up Copy

Serial No: 10/030,988

Amendment Filed on:

4-12-2002

IN THE CLAIMS

--7. (Amended) A paper coating color characterized in that it contains, in addition to the usual additives, the novel agent according to [any one of Claims 4 to 6] Claim 4.

9. (Amended) A paper coating color according to [either one of Claims 7 or 8] Claim 7, characterized in that its water retention and Brookfield viscosity are adjusted simultaneously.

10. (Amended) Paper and cardboard coated with the coating color according to [any one of Claims 7 to 9] Claim 7.--

11/ptb

A NOVEL WATER-RETENTION AGENT WATER-SOLUBLE IN A NEUTRAL OR
ALKALINE MEDIUM OF THE VINYL-ACRYLIC COPOLYMER TYPE,
APPLICATIONS TO COATING COLORS FOR PAPER AND CARDBOARD, AND
COATING COLORS AND PAPERS AND CARDBOARDS THUS OBTAINED

- 5 The present invention relates to the technical sector of paper and cardboard manufacture, and in particular the sector concerning water-retention agents and rheology modifying agents used for the manufacture of coating colors.

10 It is known that, in the techniques of coating sheets of paper, cardboard or the like, there is deposited on the support surface or surfaces a coating composition which can contain one or more mineral fillers, one or more binders and various additives.

Amongst these additives are water-retention agents, not to be confused with agents for the retention of fines or filler on the wire during the manufacture of the paper.

15 A composition for coating paper generally consists of a filler, which can be one or more pigments, one or more polymer binders and various additives such as in particular a lubricant such as a calcium stearate, a wax or a fatty acid ester, and possibly antifoaming agents and the like, well-known to persons skilled in the art.

20 After deposition on the support, the coating color has a natural tendency to transfer into the support all or part of the water and the water-soluble parts which it contains. It is necessary to control excessively rapid migration, which would impair the physical and optical characteristics of the coating.

It is therefore sought to retain the water in the coating composition or coating color. Thus this water retention must be controlled, in order to prevent changes in the rheology of the unused coating color recycled in the coating process.

25 Use is habitually made, as a water-retention agent, of natural or synthetic agents such as carboxymethylcellulose (CMC), starch, polyvinyl alcohols (PVAs) or certain latexes or emulsions of polymers with a high carboxyl content or polycarboxylates, for example of

the polyacrylate type. Such substances are described, for example, in the patent EP 0 509 878.

A particular class of retention agent is known as alkali swellable polymers, and is described in the aforementioned patent, and as prior art in US patent 4,780,500, which describes water-retention agents consisting mainly of acrylic acid monomer and secondarily itaconic acid monomer, with a molecular weight of 100,000 to 800,000.

It is also known that known products of the PVA or CMC type have limited use because of the high viscosities which they develop in the coating colors in parallel to their efficacy with respect to water-retention.

Thus such additives pose the following problems:

- the need for compatibility with the other ingredients in the coating color, such as the pigments such as carbonates, kaolin and the like, or binders such as latexes of the SBR type (styrene-butadiene-rubber latex), and other ingredients well know to persons skilled in the art;
- increase in the viscosity up to values which are not optimal for the preparation and use of the coating color;
- risk of affecting machinability;
- risk of affecting the properties of the coating color or properties of the manufactured coated paper, such as a good gloss;
- coating splashes;
- the formation of dribbles during the deposition which may go as far as the presence of scratches on the coated paper, also referred to as the phenomenon of "bleeding".

The problem posed by the current inadequacies of the technology in this regard is therefore managing to reconcile often contradictory requirements, such as in particular the need for

excellent water-retention in the coating color, which, according to current knowledge, can be obtained only by the addition of additives increasing the viscosity of the coating color but which may pose problems of machinability and also problems because, by hypothesis, the viscosity of the coating color becomes too high compared with the optimum value which would be desirable.

The invention relates in particular to agents aimed at obtaining the above properties.

It has been sought in the prior art to resolve this problem in various ways, particularly in the following documents, which can be classified in several categories.

It has notably been sought in the prior art to produce agents consisting of non water-soluble copolymers, such as for example in the German patent document DD 231 819, which concerns to binders adapted to coating colors and which procure effects which are unfavourable to the rheological properties.

US patent 4,474,919 also describes non water-soluble agents of the latex type containing styrene and for example acrylic acid.

Likewise, the patent FR 2 675 165 relates to a composition for the coating of paper with an alkaline pH comprising a mixture of two insoluble latexes with special granulometries, these granulometries forming the essential teachings of this patent, and a mineral pigment, also clearly specified, aimed at improving water retention and machinability, with a "suitable" viscosity. It should be noted that the granulometry is also the main teaching of the patent FR 2 740 456.

Likewise, the document JP 58-054096 is known, which describes agents which, according to the proportions of their components, are latexes.

The patent JP-56101996 can also be cited, which, relating to a mixture of a styrene and maleic acid semi-ester copolymer and a terpolymer of styrene, acrylic acid and acrylic ester, says nothing about the simultaneous control of the viscosity and water retention of the coating color.

The same analysis applies to the patent JP-56101995.

Likewise, the patent DD 151 463 describes a viscosity regulating latex which is of the conventional binder type and relates only to the improvement in the viscosity and not the water retention.

US patent 5,650,458 also describes compositions based on mixtures of styrene polymer and possibly acrylic acid, butyl-benzyl phthalate, butadiene-styrene latex, and a styrene and acrylic acid copolymer. This document relates only to the water retention and the quality of the final paper.

Equally, the patent JP-55018423 describes an acrylic acid copolymer and other monomers such as styrene in order to produce a simple dispersant which improves only the flow characteristics of the coating color.

Thus styrene and (meth)acrylic monomers are naturally monomers known in general terms in the field of coating colors for paper, and also in many other fields such as dispersants, agents for paint, etc.

As can be seen from a reading of the above analysis, the prior art does not particularly direct persons skilled in the art towards a choice of comonomers for resolving the problems the solution of which the invention relates to.

On the contrary, the prior art shows that many comonomers are used for different or very specific purposes, such as the viscosity properties, or water retention, or as dispersants, or as conventional binders, or co-binders etc, and for preparing both water-soluble and insoluble copolymers.

The merit of the invention is to have approached the problem from a different angle by seeking a single agent which makes it possible to resolve the entire aforementioned problem and its technical components, also described above.

It has now been discovered that the use of certain copolymers makes it possible to simultaneously adjust on the one hand the water retention of paper coating colors for the manufacture of paper and cardboard, and on the other hand the viscosity of the said coating colors.

Thus one of the aims of the invention consists of the use, for manufacturing paper coating colors, of a copolymer as an agent for simultaneously adjusting the water retention of the coating color and its Brookfield viscosity, that is to say making it possible to obtain simultaneously a high water retention in the coating color and a low Brookfield viscosity of the said coating color or a high water retention in the coating color and a high Brookfield viscosity of the said coating color when the latter is required by the final user.

This use is characterised in that the said copolymer is water soluble in a neutral or alkaline medium and in that it consists of copolymers composed of:

A) 25% to 45% by weight monomer units whose homopolymer has a $T_g > 90^\circ\text{C}$,

10 B) 30% to 65% by weight anionic monomer units,

C) 0% to 30% by weight non-ionic monomer units other than the monomers A),

D) 0% to 5% by weight cross-linking monomer units.

A copolymer which is water-soluble in a neutral or alkaline medium means, according to the Applicant, copolymers which give a homogeneous solution which is clear to cloudy in a neutral or alkaline medium.

According to a preferred embodiment, the invention proposes the use of an agent on the one hand adjusting the water retention of coating colors for the manufacture of paper and cardboard, and on the other hand making it possible to adjust, without supplementary additives, the viscosity of the said coating color, a use characterised in that the said agent is water-soluble in a neutral or alkaline medium and in that it consists of copolymers composed of:

A) 25% to 45% by weight monomer units chosen from amongst styrene, α -methylstyrene and their derivatives or methyl methacrylate,

B) 30% to 65% by weight anionic monomer units chosen from amongst acrylic acid or methacrylic acid or their mixtures and possibly chosen from amongst:

- acrylamido methyl propane sulphonic acid or AMPS,
- ethylene glycol or propylene glycol (meth)acrylate phosphates, sulphates, phosphonates or sulphonates,
- sodium methallylsulphonate (MTAS) or allylsulphonate,
- itaconic acid,
- sodium styrene sulphonate,
- tetrahydrophthalic anhydride.

10 C) 0% to 30% by weight non-ionic monomer units other than the monomers A) chosen non-limitatively from amongst acrylic or methacrylic acid esters or ethers, oxyalkylated monomers with ethylenic non-saturation terminated by a chain, linear or branched, such as the linear or branched alkyl, aryl, alkylaryl or arylalkyl groups having 1 to 50 carbon atoms and in particular the di- tri- and tetrasterylphenol groups, 15 the nonylphenols or others, or chosen from amongst vinyl esters, allyl esters or diisobutylene, vinylpyrrolidone, vinylcaprolactam, acrylonitrile, unsaturated urethanes, acrylamides and methacrylamides, substituted or not,

D) 0% to 5% by weight crosslinking monomer units chosen from amongst the monomers having at least two ethylenic non-saturations.

20 According to a particular embodiment, the invention proposes the use of an agent on the one hand adjusting the water retention of coating colors for manufacturing paper and cardboard, and on the other hand making it possible to adjust, without supplementary additives, the viscosity of the said coating color, a use characterised in that the said agent is water-soluble in a neutral or alkaline medium and in that it consists of copolymers 25 composed of:

A) 25% to 45% by weight monomer units chosen from amongst styrene, α -methylstyrene and their derivatives or methyl methacrylate,

B) 30% to 65% by weight anionic monomer units chosen from amongst acrylic acid or methacrylic acid or their mixtures and possibly chosen from amongst:

- 5 - acrylamido methyl propane sulphonic acid or AMPS,
- ethylene glycol or propylene glycol (meth)acrylate phosphates, sulphates, phosphonates or sulphonates,
- sodium methallylsulphonate (MTAS) or allylsulphonate,
- itaconic acid,
- 10 - sodium styrene sulphonate,
- tetrahydrophthalic anhydride.

C) 0% to 30% by weight non-ionic monomer units other than the monomers A) chosen more particularly from amongst methyl, ethyl, butyl, 2-ethyl-hexyl, ethylene or propylene glycol acrylates or methacrylates, oxyethylated acrylates or methacrylates terminated by a chain, linear or branched, such as the linear or branched alkyl, aryl, alkylaryl or arylalkyl groups with 1 to 50 carbon atoms and in particular the di-, tri- and tetrastyrilphenol groups, nonylphenols, vinyl acetate, allyl ethers or diisobutylene, vinylpyrrolidone, vinylcaprolactam, acrylonitrile, acrylurethanes, methacrylurethanes, α - α' dimethyl-m-isopropenylbenzyl urethane, allylurethane, acrylamides and methacrylamides, substituted or not.

D) 0% to 5% by weight monomer units having at least two ethylenic non-saturations chosen non-limitatively from the group consisting of ethylene glycol dimethacrylate, trimethylolpropanetriacrylate, allyl acrylate, allyl maleates, methylene-bis-acrylamide, methylene-bis-methacrylamide, tetrallyloxyethane, the triallylcyanurates, the trivinylcyclohexane, the allyl ethers obtained from polyols such as pentaerythritol, sorbitol, sucrose or others.

The invention therefore also proposes a novel agent, on the one hand adjusting the water retention of coating colors for the manufacture of paper and cardboard, and on the other hand making it possible to adjust, without supplementary additives, the viscosity of the said coating color. This novel agent is characterised in that it is the copolymer defined
5 above.

A high water retention in coating colors means, in the context of the invention, a water retention greater than that of the prior art, for an equal Brookfield viscosity.

A low Brookfield viscosity means, in the context of the invention, a viscosity less than that of the prior art, for an equal water retention.

10 The invention also relates to the coating colors containing the said agent.

These coating colors according to the invention are characterised in that they contain, in addition to the usual additives, 0.1% to 2.0% by weight dry and preferentially 0.5% to 1.0% by dry weight, with respect to the dry weight of the fillers, of the novel agent
15 according to the invention.

These coating colors according to the invention are prepared in a conventional manner by persons skilled in the art by mixing in water aqueous suspensions of mineral fillers such as for example natural calcium carbonates, notably chalk, calcite, marble or synthetic calcium carbonates, dolomites, kaolins, talc, titanium dioxide, satin white, mica, calcinated clay,
20 aluminium hydroxide, calcium sulphate or mixtures thereof, the water retention agent, possibly one or more binders of natural or synthetic origin such as for example casein, starch, carboxymethylcellulose, polyvinyl alcohols or latex of the styrene-acrylate or styrene-butadiene type or acrylic or vinyl latexes or others.

25 The coating colors according to the invention can also contain, in a known fashion, usual additives such as rheology modifiers, organic fillers, anti-foaming agents, optical brighteners, biocides, lubricants, alkaline hydroxides, insolubility agents such as for example ureas and/or melamine formaldehyde, epichlorhydrin, and others.

According to the invention, the paper coating colors containing one or more fillers, the water retainer or retainers, possibly one or more polymer binders, pigments, optical brighteners and various other paper additives are characterised in that the water retention and Brookfield viscosities of the paper coating colors are simultaneously adjusted by the use of the water retention agent according to the invention.

The water retention of the coating colors is determined by the method described below.

The paper coating color to be tested is subjected to a pressure of 100 psi (7 bars) in a standard cylinder, equipped with a surface of the filter paper type capable of allowing water to pass.

10 After 20 minutes, the volume of water collected is measured in ml.

The lower the volume of water collected at the end of 20 minutes, the better is the retention.

To do this, use is made of an "API Fluid Loss Measurement" filter press (Figure 1/1) from Baroïd, which is composed essentially of a clamp (1) provided with a clamping screw (2) for locking the three parts of the filter body (3).

This body (3) is composed of:

- a base (4) with a hole provided with a nozzle through which the filtrate flows. This base (4) supports a metallic sieve (5) with a mesh of 60 to 80, on which is placed the 90 mm diameter filter paper (6) (Whatman™ N° 50), the equivalent of which is the DURIEUX BLEU™ N° 3 type,
- a cylinder with an inside diameter of 76.2 mm and a height of 128 mm,
- a cover (7) provided with a compressed gas inlet, whose seal with the cylinder is provided by means of a flat joint (8), of the same type as those (9) placed on the base (4).

25 To use the filter press, the following are fitted in the following order:

- the joint (9) on the base (4)
- the sieve (5) on the joints (9)
- the filter paper (6) on the sieve (5)
- the second joint (10) on the filter paper (6)

5 and the cylinder is fitted on the base (4) before locking the bayonet system.

Then it is filled with the coating color to be tested (approximately 480 g up to 3 cm from the top of the cylinder) before placing the cover (7) on the cylinder, interposing a joint (8).

Then the assembly is placed in the clamp (1) and is locked by means of the clamping screw (2), and then a graduated tube (12) is arranged underneath the nozzle.

10 A pressure of 7 bars is applied, simultaneously triggering a chronometer.

After 20 minutes the volume of fluid collected in the test tube (12) is noted. The accuracy of the result obtained is ± 0.2 ml.

The invention finally relates to the papers and cardboards coated with the coating colors according to the invention.

15 Other characteristics and advantages of the invention will emerge more clearly from a reading of the following description, with reference to the examples below, which should not be regarded as having any character limitative of the invention.

EXAMPLE 1

20 This example relates to the evaluation of the efficacy of the agents according to the invention by determining the different Brookfield viscosity and water retention values of the different 100% calcium carbonate coating colors which are composed of:

- 100 parts, expressed as dry matter, of an aqueous suspension of calcium carbonate sold by Omya under the name "HYDROCARB™ 90/78 ME",
 - 12 parts, expressed as dry matter, of a styrene-butadiene latex sold by Dow under the name "DL 950",
- 5 - 0.5 parts, expressed as dry matter, of the water retention agent to be tested, with the exception of the coating color of Test N° 2, which contains 0.1 parts thereof.

Test N° 1:

- 10 This test illustrates the prior art and uses a carboxymethylcellulose (CMC) A with a viscosity between 50 and 200 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 65.8% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 2:

- 15 This test illustrates the prior art and uses a carboxymethylcellulose (CMC) A with a viscosity between 50 and 200 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 66.2% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 3:

- 20 This test illustrates the prior art and uses a carboxymethylcellulose (CMC) B with a viscosity between 20 and 50 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 66.2% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 4:

This test illustrates the prior art and uses a carboxymethylcellulose (CMC) C with a viscosity of between 200 and 500 mPa.s measured in a 4% aqueous solution at 25°C.

5 The dry matter content of the coating color is around 66.2% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 5:

This test illustrates the prior art and uses a water retention agent of the prior art composed, as a percentage by mass of monomer, of 37% methacrylic acid and 63% ethyl acrylate.

10 The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 6:

This test illustrates the invention and uses a agent according to the invention composed of:

- 40.6% by weight styrene,
- 44.1% by weight methacrylic acid,
- 15 - 15.3% by weight butyl acrylate.

The dry matter content of the coating color is around 65.8% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 7:

20 This test illustrates the invention and uses an agent according to the invention composed of:

- 40.6% by weight methyl methacrylate,

- 44.1% by weight methacrylic acid,

- 15.3% by weight butyl acrylate.

The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

5 Test N° 8:

This test illustrates the invention and uses an agent according to the invention composed of:

- 30.6% by weight styrene,

- 44.1% by weight methacrylic acid,

10 - 15.3% by weight butyl acrylate,

- 10.0% by weight tristyrylphenol methacrylate oxyethylated by 2 moles of ethylene oxide.

The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

15 Test N° 9:

This test illustrates the invention and uses an agent according to the invention composed of:

- 31.0% by weight styrene,

- 53.7% by weight methacrylic acid,

20 - 15.3% by weight butyl acrylate.

2024-04-10 10:30:00

The dry matter content of the coating color is around 66.2% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 10:

- 5 This test illustrates the invention and uses an agent according to the invention composed of:

- 39.7% by weight styrene,
- 43.1% by weight methacrylic acid,
- 15.0% by weight butyl acrylate.

- 10 - 2.2% by weight ethylene glycol dimethacrylate.

The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 11:

- 15 This test illustrates the invention and uses an agent according to the invention composed of:

- 40.6% by weight styrene,
- 30.8% by weight methacrylic acid,
- 13.3% by weight acrylic acid,
- 15.3% by weight butyl acrylate.

The dry matter content of the coating color is around 65.9% and the pH is around 8.5 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 12:

5 This test illustrates the invention and uses an agent according to the invention composed of:

- 40.6% by weight styrene,
- 35.2% by weight methacrylic acid,
- 15.3% by weight butyl acrylate,
- 8.9% by weight ethylene glycol methacrylate.

10 The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 13:

This test illustrates the invention and uses an agent according to the invention composed of:

- 15
- 39.7% by weight styrene,
 - 43.1% by weight methacrylic acid,
 - 15.0% by weight butyl acrylate,
 - 2.2% by weight trivinyl cyclohexane.

20 The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 14:

This test illustrates the invention and uses an agent according to the invention composed of:

- 40.1% by weight styrene,
- 5 - 43.5% by weight methacrylic acid,
- 13.1% by weight butyl acrylate,
- 1.3% by weight ethylene glycol dimethacrylate.

The dry matter content of the coating color is around 65.8% and the pH is around 8.5 by adjustment with an aqueous solution of sodium hydroxide.

- 10 The results of the water retention measurement obtained according to the method described above in the description are set out in Table 1 below.

The results of the measurements of Brookfield viscosity determined at 10 and 100 revolutions per minute at 25°C by means of a Brookfield viscometer type DV-1 equipped with the appropriate spindle also appear in Table 1.

10030988-041202

TABLE 1

Test N°	PRIOR ART				INVENTION									
	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Filler: CaCO ₃ (dry)	100	100	100	100	100	100	100	100	100	100	100	100	100	100
Blender: Styrene butadiene latex (dry)	12	12	12	12	12	12	12	12	12	12	12	12	12	12
Additive (dry):														
CMC A	0.5													
CMC A		0.1												
CMC B			0.5											
CMC C				0.5										
Copolymer Test N° 5					0.5									
Copolymer Test N° 6						0.5								
Copolymer Test N° 7							0.5							
Copolymer Test N° 8								0.5						
Copolymer Test N° 9									0.5					
Copolymer Test N° 10										0.5				
Copolymer Test N° 11											0.5			
Copolymer Test N° 12												0.5		
Copolymer Test N° 13													0.5	
Copolymer Test N° 14														0.5
pH	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.5	8.6	8.6	8.5
Dry extract	65.8	66.2	66.2	66.2	66.1	65.8	66.1	66.0	66.2	66.1	65.9	66.1	66.1	65.8
Brookfield viscosities mPas	7280	1380	6000	10520	16300	840	5920	2260	7300	1350	1720	770	2320	1420
	1160	360	960	1600	2750	320	1120	660	1460	480	500	275	610	340
Water retention (ml)	5.0	5.9	5.7	3.6	1.5	5.0	3.1	2.6	1.7	4.3	4.6	4.5	3.9	4.9

A reading of Table 1 shows on the one hand that, with respect to a viscosity and water retention pair, referred to here as standard, and represented by Test N° 1, the prior art does not make it possible to reduce (Tests N° 2 and N° 3) or raise (Tests N° 4 and N° 5) the viscosity and water retention except concomitantly.

- 5 Moreover this Table 1 shows that, with respect to a viscosity and water retention pair, here referred to as standard, and represented by Test N° 1 of the prior art, the object of the invention represented by Tests 6, 7, 8, 10, 11 and 12 makes it possible to obtain water retentions greater than or equal to the standard with corresponding viscosities less than that of the standard.

10

Test N° 9 shows that a water retention value three times greater than that of the standard is obtained for a viscosity value slightly greater than that of the standard of the prior art.

EXAMPLE 2

- 15 This example relates to the evaluation of the efficacy of the agents according to the invention by determining the different Brookfield viscosity and water retention values of the different coating colors (80% calcium carbonate - 20% kaolin), which are composed of:

- 80 parts, expressed as dry matter, of an aqueous suspension of calcium carbonate sold by Omya under the name "HYDROCARB™ 90/78 ME",
- 20 - 20 parts, expressed as dry matter, of a kaolin sold by Huber under the name "HYDRAGLOSS™ 90",
- 12 parts, expressed as dry matter, of a styrene-butadiene latex sold by Dow under the name "DL 950",
- 0.5 parts, expressed as dry matter, of the water retention agent to be tested, with the exception of the coating color of Test N° 16, which contains 0.1 parts thereof.

- 25 Test N° 15:

This test illustrates the prior art and uses a carboxymethylcellulose (CMC) A with a viscosity between 50 and 200 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 65.8% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

5 Test N° 16:

This test illustrates the prior art and uses a carboxymethylcellulose (CMC) A with a viscosity of between 50 and 200 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 66.2% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

10 Test N° 17:

This test illustrates the prior art and uses a carboxymethylcellulose (CMC) B with a viscosity of between 20 and 50 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

15 Test N° 18:

This test illustrates the prior art and uses a carboxymethylcellulose (CMC) C with a viscosity of between 200 and 500 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

20 Test N° 19:

This test illustrates the prior art and uses a water retention agent of the prior art composed, as a percentage by mass of monomer, 37% methacrylic acid and 63% ethyl acrylate.

The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

10030988-041202

Test N° 20:

This test illustrates the invention and uses an agent according to the invention composed of:

- 40.6% by weight styrene,
- 5 - 44.1% by weight methacrylic acid,
- 15.3% by weight butyl acrylate.

The dry matter content of the coating color is around 66.2% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 21:

- 10 This test illustrates the invention and uses an agent according to the invention composed of:

- 40.6% by weight methyl methacrylate,
- 44.1% by weight methacrylic acid,
- 15.3% by weight butyl acrylate.

- 15 The dry matter content of the coating color is around 65.9% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 22:

This test illustrates the invention and uses an agent according to the invention composed of:

- 20 - 30.6% by weight styrene,
- 44.1% by weight methacrylic acid,

- 15.3% by weight butyl acrylate,
- 10.0% by weight tristyrylphenol methacrylate oxyethylated by 2 moles of ethylene oxide.

5 The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 23:

This test illustrates the invention and uses an agent according to the invention composed of:

- 31.0% by weight styrene,
- 10 - 53.7% by weight methacrylic acid,
- 15.3% by weight butyl acrylate.

The dry matter content of the coating color is around 65.8% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 24:

15 This test illustrates the invention and uses an agent according to the invention composed of:

- 39.7% by weight styrene,
- 43.1% by weight methacrylic acid,
- 15.0% by weight butyl acrylate,
- 20 - 2.2% by weight ethylene glycol dimethacrylate.

The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 25:

5 This test illustrates the invention and uses an agent according to the invention composed of:

- 40.6% by weight styrene,
- 30.8% by weight methacrylic acid,
- 13.3% by weight acrylic acid,
- 15.3% by weight butyl acrylate.

10 The dry matter content of the coating color is around 66.1% and the pH is around 8.5 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 26:

This test illustrates the invention and uses an agent according to the invention composed of:

- 15
- 40.6% by weight styrene,
 - 35.2% by weight methacrylic acid,
 - 15.3% by weight butyl acrylate,
 - 8.9% by weight ethylene glycol methacrylate.

20 The dry matter content of the coating color is around 65.9% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 27:

This test illustrates the invention and uses an agent according to the invention composed of:

- 39.7% by weight styrene,
- 43.1% by weight methacrylic acid,
- 5 - 15.0% by weight butyl acrylate,
- 2.2% by weight trivinyl cyclohexane.

The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 28:

- 10 This test illustrates the invention and uses an agent according to the invention composed of:

- 40.1% by weight styrene,
- 43.5% by weight methacrylic acid,
- 13.1% by weight butyl acrylate,
- 15 - 1.3% by weight ethylene glycol dimethacrylate.

The dry matter content of the coating color is around 65.6% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 29:

- 20 This test illustrates the invention and uses an agent according to the invention composed of:

- 30.0% by weight styrene,

- 60.0% by weight methacrylic acid,
- 10.0% by weight butyl acrylate.

The dry matter content of the coating color is around 65.8% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

- 5 The results of the measurement of water retention obtained according to the method described above in the description are set out in Table 2 below.

The results of the measurements of Brookfield viscosity determined at 10 and 100 revolutions per minute at 25°C by means of a Brookfield viscometer type DV-1 equipped with the appropriate spindle also appear in Table 2.

2024-09-04 10:00:00

TABLE 2

Test N°	PRIOR ART										INVENTION									
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29					
Filler: CaCO ₃ (dry)	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80					
Filler: Kaolin (dry)	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20					
Styrene butadiene latex (dry)	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12					
Additive (dry):																				
CMC A	0,5																			
CMC A		0,1																		
CMC B			0,5																	
CMC C				0,5																
Copolymer Test N° 19					0,5															
Copolymer Test N° 20						0,5														
Copolymer Test N° 21							0,5													
Copolymer Test N° 22								0,5												
Copolymer Test N° 23									0,5											
Copolymer Test N° 24										0,5										
Copolymer Test N° 25											0,5									
Copolymer Test N° 26												0,5								
Copolymer Test N° 27													0,5							
Copolymer Test N° 28														0,5						
Copolymer Test N° 29															0,5					
pH	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6	8,6					
Dry extract	65,8	66,2	66	66,1	66	66,2	65,9	66,0	65,8	66,0	66,1	65,9	66,0	65,6	65,8					
Brookfield viscosities mPas	7470 1280	2280 480	7040 1160	11400 1880	16900 2700	1880 520	8040 1610	4760 1150	4530 860	4120 910	4680 1130	1500 470	3000 780	2100 440	6800 1560					
Water retention (ml)	4,3	5,5	4,5	3,1	1,8	5,8	2,4	3,1	2,2	3,0	4,2	5,5	4,8	5,1	2,6					

A reading of Table 2 shows on the one hand that, with respect to a viscosity and water retention pair, referred to here as standard, and represented by Test N° 15, the prior art does not make it possible to reduce (Tests 16 and N° 17) or increase (Tests 18 and 19) the viscosity and water retention except concomitantly.

5

Moreover this Table 2 shows that, with respect to a viscosity and water retention pair, here referred to as standard, and represented by Test N° 15 of the prior art, the object of the invention represented by Tests 21, 22, 23, 24, 25 and 29 makes it possible to obtain water retentions greater than or equal to the standard with corresponding viscosities less than those of the prior art.

10

Tests 20 and 28 show that a water retention slightly less than that of the standard is obtained for a viscosity very appreciably less than that of the standard of the prior art.

EXAMPLE 3

15 This example relates to the use of various quantities of the agents according to the invention by determining the different Brookfield viscosity and water retention values of a 100% calcium carbonate coating color which is composed of:

- 100 parts, expressed as dry matter, of an aqueous suspension of calcium carbonate sold by Omya under the name "HYDROCARB™ 90 OG 75%",
- 20 - 12 parts, expressed as dry matter, of a styrene-butadiene latex sold by Dow under the name "DL 950",
- the quantity, expressed as dry matter, of the water retention agent to be tested.

Test N° 30:

25 This test illustrates the prior art and uses 0.1 part, expressed as dry matter, of a carboxymethylcellulose (CMC) A with a viscosity between 50 and 200 mPa.s measured in a 4% aqueous solution at 25°C.

10030900.041212

The dry matter content of the coating color is around 66,1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 31:

- 5 This test illustrates the prior art and uses 1.0 part, expressed as dry matter, of a carboxymethylcellulose (CMC) A with a viscosity between 50 and 200 mPa.s measured in a 4% aqueous solution at 25°C.

The dry matter content of the coating color is around 66.1% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 32:

- 10 This test illustrates the invention and uses 0.1 part, expressed as dry matter, of an agent according to the invention composed of:
- 40.3% by weight styrene,
 - 31.0% by weight methacrylic acid,
 - 13.3% by weight acrylic acid,
 - 15 - 15.4% by weight butyl acrylate.

The dry matter content of the coating color is around 66.2% and the pH is around 8.5 by adjustment with an aqueous solution of sodium hydroxide.

Test N° 33:

- 20 This test illustrates the invention and uses 1.0 part, expressed as dry matter, as the same agent as the previous test.

The dry matter content of the coating color is around 66.0% and the pH is around 8.6 by adjustment with an aqueous solution of sodium hydroxide.

The results of the water retention measurement obtained according to the method described above in the description are set out in Table 3 below.

The results of the measurements of Brookfield viscosity determined at 10 and 100 revolutions per minute at 25°C by means of a Brookfield viscometer type DV-1 equipped with the appropriate spindle also appear in Table 3.

TABLE 3

Test N°		Prior art		Invention	
		30	31	32	33
Filler : CaCO ₃ (dry)		100	100	100	100
Binder : styrene-butadiene latex (dry)		12	12	12	12
Additive (dry) : CMC		0,1	1	-	-
Copolymer test N° 32		-	-	0,1	1
pH		8,6	8,6	8,6	8,6
Solid content	%	66,1	66,1	66,2	66,0
Brookfield viscosities mPas	10 rev/min	2020	14700	1090	1700
	100 rev/min	480	2250	290	530
Water-retention (ml)	Vol in 20 min	11,0	5,8	11,0	6,2

The reading of table 3 shows the obtention of coating color according to the invention containing 0.1% to 2.0 % by dry weight, with respect to the dry weight of the fillers, of the agent according to the invention.

CLAIMS

1. The use, for the manufacture of paper coating colors, of a copolymer as an agent for simultaneously adjusting the water retention of the coating color and its Brookfield viscosity, characterised in that the said copolymer is water soluble in a neutral or alkaline medium and in that it consists of copolymers composed of:
 - A) 25% to 45% by weight monomer units whose homopolymer has a $T_g > 90^\circ\text{C}$,
 - B) 30% to 65% by weight anionic monomer units,
 - C) 0% to 30% by weight non-ionic monomer motives other than the monomers A),
 - D) 0% to 5% by weight cross-linking monomer units.
2. The use, for the manufacture of paper coating colors, of a copolymer according to Claim 1, characterised in that the said copolymer is water-soluble in a neutral or alkaline medium and in that it consists of copolymers composed of:
 - A) 25% to 45% by weight monomer units chosen from amongst styrene, α -methylstyrene and their derivatives or methyl methacrylate,
 - B) 30% to 65% by weight anionic monomer units chosen from amongst acrylic acid or methacrylic acid or their mixtures and possibly chosen from amongst:
 - acrylamido methyl propane sulphonic acid or AMPS,
 - ethylene glycol or propylene glycol (meth)acrylate phosphates, sulphates, phosphonates or sulphonates,
 - sodium methallylsulphonate (MTAS) or allylsulphonate,
 - itaconic acid,

10030988.041E02

- sodium styrene sulphonate,
- tetrahydrophthalic anhydride.

5 C) 0% to 30% by weight non-ionic monomer units other than the monomers A) chosen from amongst acrylic or methacrylic acid esters or ethers, oxyalkylated monomers with ethylenic non-saturation terminated by a chain, linear or branched, such as the linear or branched alkyl, aryl, alkylaryl or arylalkyl groups having 1 to 50 carbon atoms and in particular the di- tri- and tetrasterylphenol groups or the nonylphenols, or chosen from amongst vinyl esters, allyl esters or diisobutylene, vinylpyrrolidone, vinylcaprolactam, acrylonitrile, unsaturated urethanes, acrylamides and methacrylamides, substituted or not,

10 D) 0% to 5% by weight crosslinking monomer units chosen from amongst the monomers having at least two ethylenic non-saturations.

15 3. The use, for the manufacture of paper coating colors, of a copolymer according to Claim 2, characterised in that the said copolymer is water-soluble in a neutral or alkaline medium and in that it consists of copolymers composed of:

A) 25% to 45% by weight monomer units chosen from amongst styrene, α -methylstyrene and their derivatives or methyl methacrylate,

B) 30% to 65% by weight anionic monomer units chosen from amongst acrylic acid or methacrylic acid or their mixtures and possibly chosen from amongst:

- 20 - acrylamido methyl propane sulphonic acid or AMPS,
- ethylene glycol or propylene glycol (meth)acrylate phosphates, sulphates, phosphonates or sulphonates,
- sodium methallylsulphonate (MTAS) or allylsulphonate,
- itaconic acid,

- sodium styrene sulphonate,
- tetrahydrophthalic anhydride.

5 C) 0% to 30% by weight non-ionic monomer units other than the monomers A) chosen more particularly from amongst methyl, ethyl, butyl, 2-ethyl-hexyl, ethylene or propylene glycol acrylates or methacrylates, oxyethylated acrylates or methacrylates terminated by a chain, linear or branched, such as the linear or branched alkyl, aryl, alkylaryl or arylalkyl groups with 1 to 50 carbon atoms and in particular the di-, tri- and tetrasterylphenol groups, nonylphenols, vinyl acetate, allyl ethers or diisobutylene, vinylpyrrolidone, vinylcaprolactam, acrylonitrile, acrylurethanes, methacrylurethanes, α - α' dimethyl-m-isopropenylbenzyl urethane, allylurethane, acrylamides and methacrylamides, substituted or not.

15 D) 0% to 5% by weight monomer units having at least two ethylenic non-saturations chosen from the group consisting of ethylene glycol dimethacrylate, trimethylolpropanetriacrylate, allyl acrylate, allyl maleates, methylene-bis-acrylamide, methylene-bis-methacrylamide, tetrallyloxyethane, the triallylcyanurates, the trivinylcyclohexane the allyl ethers obtained from polyols such as pentaerythritol, sorbitol, sucrose or others.

20 4. A novel agent for simultaneously adjusting the water retention of the coating color and its Brookfield viscosity, characterised in that the said agent is a copolymer water-soluble in a neutral or alkaline medium and in that it is composed of:

- A) 25% to 45% by weight monomer units whose homopolymer has a $T_g > 90^\circ\text{C}$,
- B) 30% to 65% by weight anionic monomer units,
- C) 0% to 30% by weight non-ionic monomer motives other than the monomers A),
- 25 D) 0% to 5% by weight cross-linking monomer units.

5. A novel agent for simultaneously adjusting the water retention of the coating color and its Brookfield viscosity according to Claim 4, characterised in that the said agent is a copolymer water-soluble in a neutral or alkaline medium and in that it is composed of:

- 5 A) 25% to 45% by weight monomer units chosen from amongst styrene, α -methylstyrene and their derivatives or methyl methacrylate,
- B) 30% to 65% by weight anionic monomer units chosen from amongst acrylic acid or methacrylic acid or their mixtures and possibly chosen from amongst:
- acrylamido methyl propane sulphonic acid or AMPS,
 - ethylene glycol or propylene glycol (meth)acrylate phosphates, sulphates, phosphonates or sulphonates,
 - sodium methallylsulphonate (MTAS) or allylsulphonate,
 - itaconic acid,
 - sodium styrene sulphonate,
 - tetrahydrophthalic anhydride.
- 15 C) 0% to 30% by weight non-ionic monomer units other than the monomers A) chosen from amongst acrylic or methacrylic acid esters or ethers, oxyalkylated monomers with ethylenic non-saturation terminated by a chain, linear or branched, such as the linear or branched alkyl, aryl, alkylaryl or arylalkyl groups having 1 to 50 carbon atoms and in particular the di- tri- and tetrastyrylphenol groups, the nonylphenols, or chosen from amongst vinyl esters, allyl esters or diisobutylene, vinylpyrrolidone, vinylcaprolactam, acrylonitrile, unsaturated urethanes, acrylamides and methacrylamides, substituted or not,
- 20 D) 0% to 5% by weight of crosslinking monomer units chosen from amongst the monomers having at least two ethylenic non-saturations.

202110 886000T

6. A novel agent for simultaneously adjusting the water retention of the coating color and its Brookfield viscosity according to Claim 5, characterised in that the said agent is a copolymer water-soluble in a neutral or alkaline medium and in that it is composed of:

- 5 A) 25% to 45% by weight monomer units chosen from amongst styrene, α -methylstyrene and their derivatives or methyl methacrylate,
- 10 B) 30% to 65% by weight anionic monomer units chosen from amongst acrylic acid or methacrylic acid or their mixtures and possibly chosen from amongst:
- acrylamido methyl propane sulphonic acid or AMPS,
 - ethylene glycol or propylene glycol (meth)acrylate phosphates, sulphates, phosphonates or sulphonates,
 - sodium methallylsulphonate (MTAS) or allylsulphonate,
 - itaconic acid,
 - sodium styrene sulphonate,
 - tetrahydrophthalic anhydride.
- 15 C) 0% to 30% by weight non-ionic monomer units other than the monomers A) chosen more particularly from amongst methyl, ethyl, butyl, 2-ethyl-hexyl, ethylene or propylene glycol acrylates or methacrylates, oxyethylated acrylates or methacrylates terminated by a chain, linear or branched, such as the linear or branched alkyl, aryl, alkylaryl or arylalkyl groups with 1 to 50 carbon atoms and in particular the di-, tri- and tetrasterylphenol groups or the nonylphenols, or even more particularly chosen
- 20 from amongst vinyl acetate, allyl ethers or diisobutylene, vinylpyrrolidone, vinylcaprolactam, acrylonitrile, acrylurethanes, methacrylurethanes, α - α' dimethyl-m-isopropenylbenzyl urethane, allylurethane, acrylamides and methacrylamides, substituted or not.

10030988 041202

5 D) 0% to 5% by weight monomer units having at least two ethylenic non-saturations chosen from the group consisting of ethylene glycol dimethacrylate, trimethylolpropanetriacrylate, allyl acrylate, allyl maleates, methylene-bis-acrylamide, methylene-bis-methacrylamide, tetraallyloxyethane, the triallylcyanurates, the trivinylcyclohexane, the allyl ethers obtained from polyols such as pentaerythritol, sorbitol, sucrose or others.

7. A paper coating color characterised in that it contains, in addition to the usual additives, the novel agent according to any one of Claims 4 to 6.

10 8. A paper coating color according to Claim 7, characterised in that it contains, in addition to the usual additives, 0.1% to 2.0% by dry weight and preferentially 0.5% to 1.0% by dry weight, with respect to the dry weight of the fillers, of the novel agent according to any one of Claims 4 to 6.

9. A paper coating color according to either one of Claims 7 or 8, characterised in that its water retention and Brookfield viscosity are adjusted simultaneously.

15 10. Paper and cardboard coated with the coating color according to any one of Claim 7 to 9.

ABSTRACT

The use, for the manufacture of paper coating colors, of a copolymer water-soluble in a neutral or alkaline medium as an agent for simultaneously adjusting the water retention of the coating colors and the Brookfield viscosity of the said coating colors.


- 5 A novel water-retention agent for paper coating colors, water-soluble in a neutral or alkaline medium.

The coating colors and the coated paper and cardboard thus obtained.

202110 041202

DRAWING 1/1

FIGURE 1

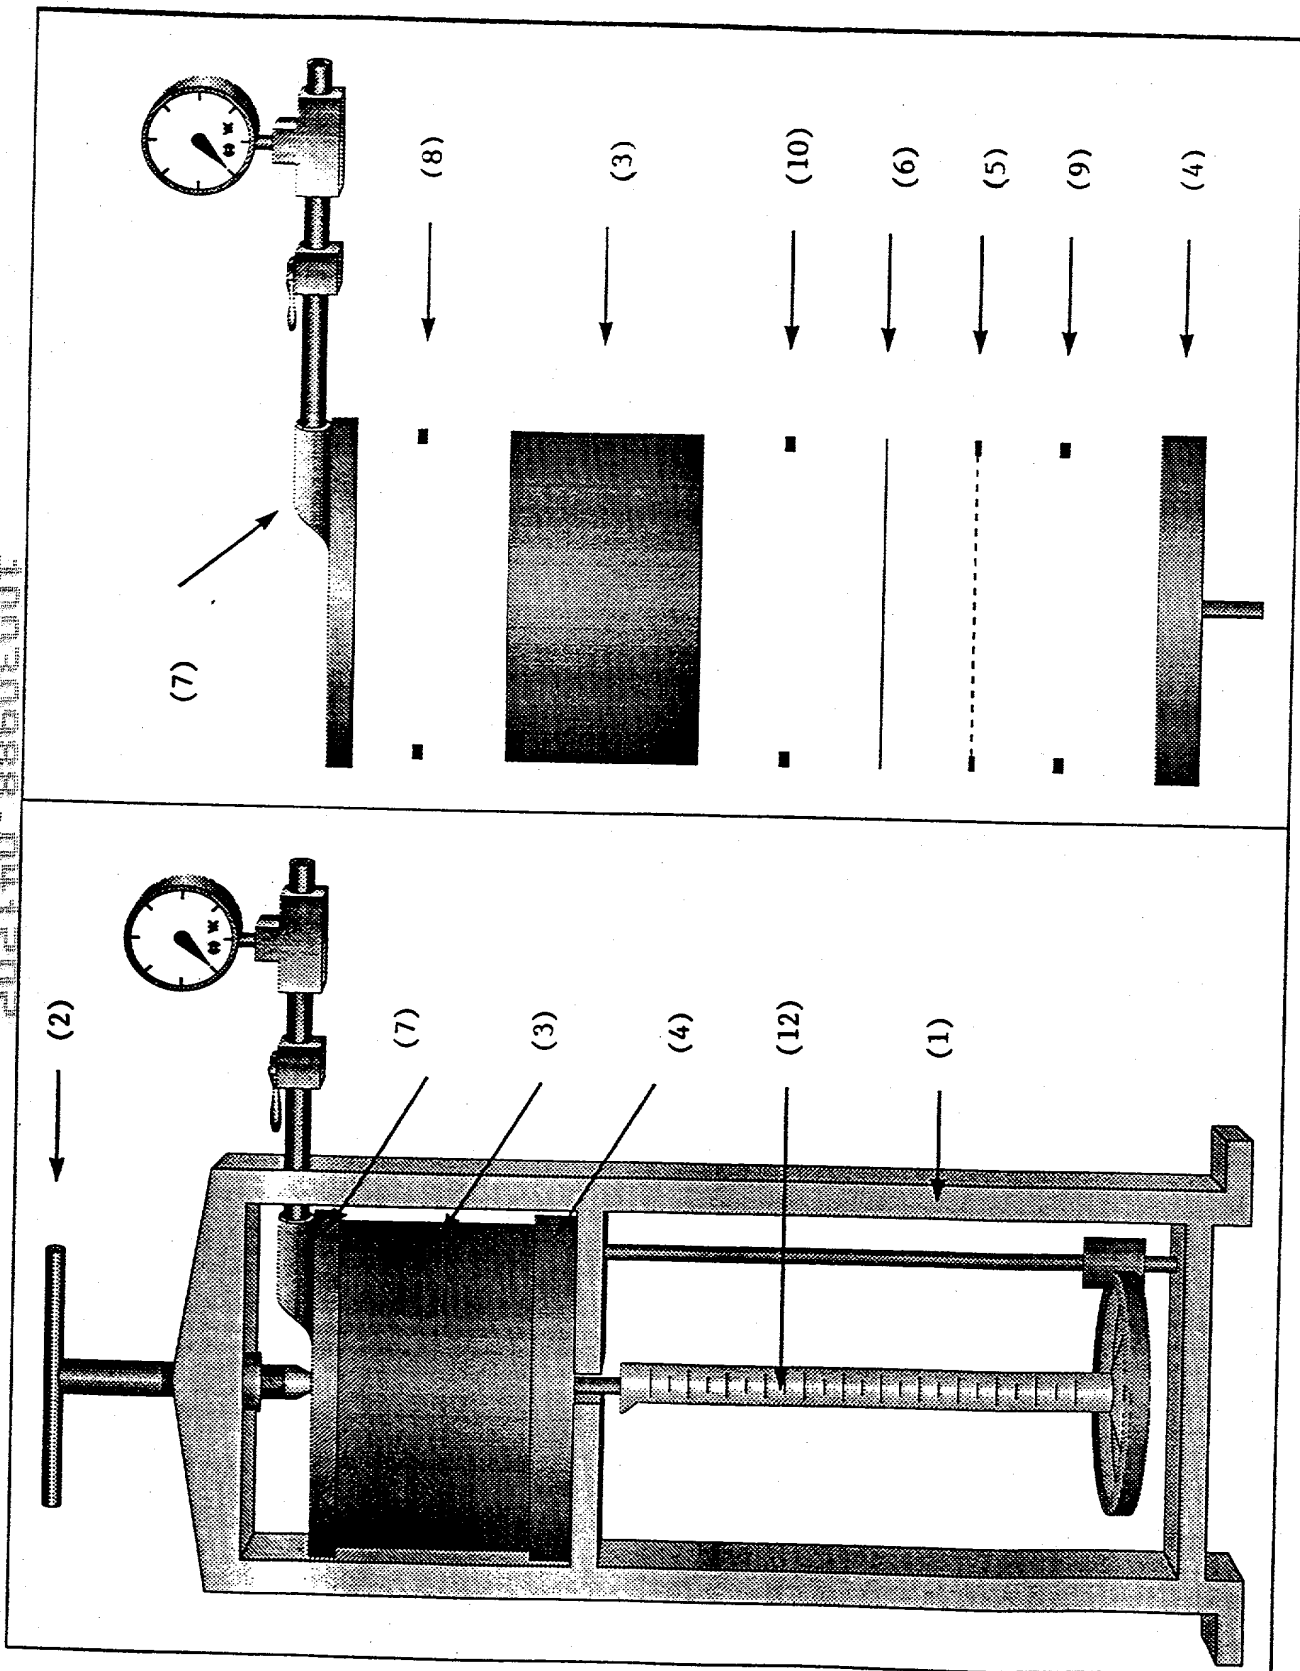

Declaration and Power of Attorney for Patent Application

Déclaration et Pouvoirs pour Demande de Brevet

French Language Declaration

En tant l'inventeur nommé ci-après, je déclare par le présent acte que:

Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée

et dont la description est fournie ci-joint à moins

☐ ci-joint

☐ a été déposée le _____

sous le numéro de demande des Etats-Unis ou le numéro de demande international PCT

_____ et modifiée le

_____ (le cas échéant).

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.

Je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations.

As a below named inventor, I hereby declare that:

My residence, mailing address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

WATER SOLUBLE RETENTION AGENT (as amended)

the specification of which

☐ is attached hereto.

☒ was filed on July 10, 2000

as United States Application Number or PCT International Application Number

PCT/FR00/01992 and was amended on

_____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou, en vertu du Titre 35, § 365(a) du même Code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

Prior Foreign Application(s)
Demande(s) de brevet antérieure(s) dans un autre pays.

99 09416	France
(Number)	(Country)
(Numéro)	(Pays)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 119(e) du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35, § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du Code fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale PCT de la présente demande:

PCT/FR00/01992	July 10, 2000
(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la § 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet délivré à partir de celle-ci.

I hereby claim foreign priority under Title 35, United States Code, § 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed
Droit de priorité
Revendiqué

16 July 1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(Jour/Mois/Année de dépôt)	Oui	Non

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(N° de demande)	(Date de dépôt)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status: Patented, Pending, Abandoned)
(Statut : breveté, en cours d'examen, abandonné)

(Status: Patented, Pending, Abandoned)
(Statut : breveté, en cours d'examen, abandonné)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

French Language Declaration

POUVOIRS: En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques: (mentionner le nom et le numéro d'enregistrement).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)



Addresser toute correspondance à:

Send Correspondence to:



Adresser tout appel téléphonique à:
(nom et numéro de téléphone)

Direct Telephone calls to: (name and telephone number)

(703) 413-3000

<input checked="" type="checkbox"/> Nom complete de l'unique ou premier inventeur	Full name of sole or first inventor <u>Francois Dupont</u>
<input checked="" type="checkbox"/> Signature de l'inventeur	<input checked="" type="checkbox"/> Inventor's signature
Date <u>1-00</u>	Date <u>February 18, 2002</u>
<input checked="" type="checkbox"/> Domicile	Residence <u>85, rue Deleuvre, F-69004 Lyon, France</u>
<input checked="" type="checkbox"/> Nationalité	Citizenship <u>France</u>
<input checked="" type="checkbox"/> Adresse Postale	Mailing Address <u>Same as Above</u>
<input checked="" type="checkbox"/> Nom complete du second co-inventeur, le cas echean	Full name of second joint inventor, If any <u>Henri Grondin</u>
<input checked="" type="checkbox"/> Signature de l'inventeur	<input checked="" type="checkbox"/> Second inventor's signature
Datum <u>2-00</u>	Date <u>February 18, 2002</u>
<input checked="" type="checkbox"/> Domicile	Residence <u>18, rue du Professeur Perrin, F-69580 Sathonay Village, France</u>
<input checked="" type="checkbox"/> Nationalité	Citizenship <u>France</u>
<input checked="" type="checkbox"/> Adresse Postale	Mailing Address <u>Same as Above</u>

French Language Declaration

Nom complet du troisième co-inventeur, le cas échéant	Full name of third joint inventor, If any <u>Georges Ravet</u>
Signature de l'inventeur Date	Third inventor's signature ✓Date
	<u>3-00</u> <u>February 20, 2002</u>
Domicile	Residence <u>Domaine Sainte Claire, 10 rue Sainte Claire</u> <u>F-34140 Bouzigues, France</u> <u>FLX</u>
Nationalité	Citizenship <u>France</u>
Adresse Postale	Mailing Address <u>Same as Above</u>

Nom complet du quatrième co-inventeur, le cas échéant 4-00	Full name of fourth joint inventor, If any <u>Jean-Marc Suau</u>
Signature de l'inventeur Date	✓Fourth inventor's signature ✓Date
	<u>February 18, 2002</u>
Domicile	Residence <u>Le Perrault, F-69480 Lucenay, France</u> <u>FLX</u>
Nationalité	Citizenship <u>France</u>
Adresse Postale	Mailing Address <u>Same as Above</u>